



Hold projects together with high-performance adhesives.

CONTACT ADHESIVES

PVA (POLYVINYL ACETATE) ADHESIVES

SOLVENTS AND CLEANERS


COLOR MATCHED CAULK





Formulated for every project.

Wilsonart® Adhesives provide a full range of high-performance bonding solutions tailored for fabricators, millworkers, commercial architects, and designers. Our offering includes contact adhesives, PVA adhesives, solvents and cleaners, and color matched caulk. These exclusive formulas ensure strong, reliable bonds across laminate, wood, and various substrates. Designed for durability and ease of use, Wilsonart Adhesives offer long-lasting performance in woodworking, construction, and commercial design applications.

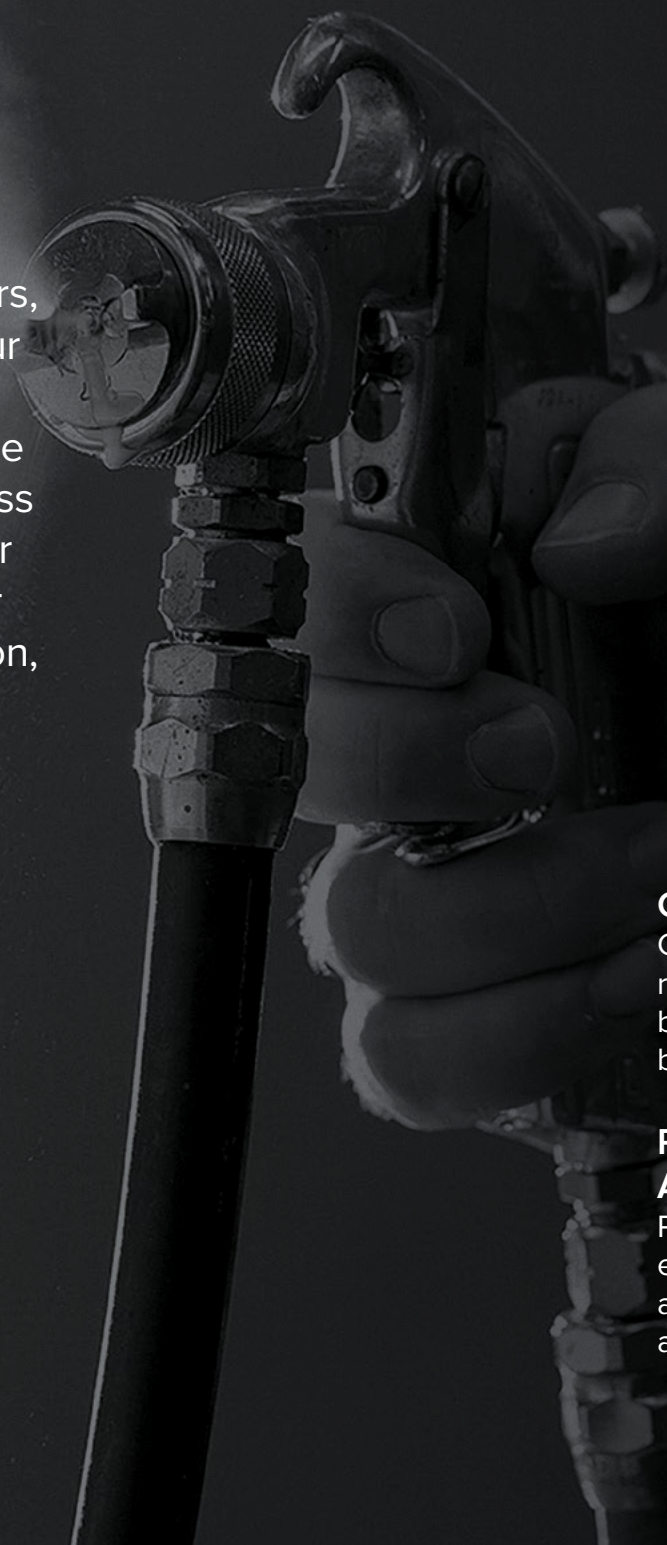

CONTACT ADHESIVES

Contact adhesives include solvents, rubbers, and resins. They are applied to both surfaces and form an ultra-durable bond to meet the needs of your project.

PVA (POLYVINYL ACETATE) ADHESIVES



PVA adhesives are formulated with emulsions, vinyls, fillers, and water. They are applied to one side of the surface and assembled wet.

SOLVENTS & CLEANERS

Choose from traditional solvents and cleaners or low-VOC solvents and cleaners.

COLOR MATCHED CAULK

A high-quality sealant formulated to match the color of Wilsonart HPL, TFL Panels, Solid Surface, Quartz, and Thinscape®.

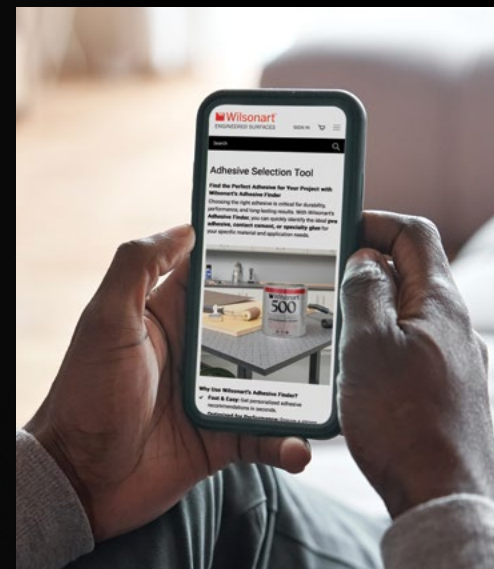

SCAN HERE TO FIND
YOUR ADHESIVE
PRODUCT SOLUTION.



50+ years of performance.

For more than half a century, Wilsonart Adhesives have been trusted by fabricators and trade professionals worldwide. As the only laminate manufacturer that also produces its own adhesives, we bring unmatched expertise to bonding solutions and ensure compatibility, reliability, and long-lasting performance across a variety of applications.



SIZES, APPLICATIONS, AND CERTIFICATIONS

1 PT	1 Pint	30 LB	30 Pound Canister		Roll-on Application		Spreader/Hot Press
14.2 OZ	Aerosol Can	45 LB	45 Pound Pail		Brush-on Application		Spreader/Cold Press
1 QT	1 Quart	140 LB	140 Pound Canister		Spray-on Application		Spreader/Pinch Roller
1 GAL	1 Gallon Pail	300 LB	300 Pound Canister		Aerosol Application		
5 GAL	5 Gallon Pail	500 LB	500 Pound Drum				
55 GAL	55 Gallon Drum	2500 LB	2500 Pound Tote				UL GREENGUARD Gold Certified
270 GAL	270 Gallon Tote						California Compliant (SCAQMD, Rule 1168)
275 GAL	275 Gallon Tote						Ozone Transport Commission Compliant
330 GAL	330 Gallon Tote						Nonflammable

Stick with sustainable.



SAFE, SUSTAINABLE FORMULAS

Many Wilsonart Adhesives are certified UL GREENGUARD Gold and free of added urea-formaldehyde and methylene chloride.

ISO CERTIFICATIONS

Wilsonart Adhesives ISO certifications include:

- ISO 14001
- ISO 45001
- ISO 9001

REDUCING WASTE

Many of our Adhesives are packaged in reusable steel and plastic containers. Containers can be cleaned and reused to prevent landfill disposal.

LEADERSHIP IN ENVIRONMENTAL DESIGN™

Wilsonart Adhesives can contribute to meeting credit requirements on a LEED-certified project, typically as a part of a finished article or permanently installed product.



Contact Adhesives

Our contact adhesives can be purchased in brush-grade and spray-grade solvent-based solutions (low-VOC, flammable, nonflammable). Contact adhesives are ideal for bonding laminates, veneers, wood, metal, and some foams and plastics. Water-based adhesives are also available.



CONTACT ADHESIVES



WA 500
The professional and economical choice for fast-drying brush/roller-grade contact adhesive.

1 GAL

5 GAL

55 GAL

330 GAL



WA 600
OTC-compliant, brush/roller-grade adhesive that applies easily and has a wider working window for consumer use.

OTC

1 QT

1 GAL

5 GAL

55 GAL



WA 800/801
Spray-grade contact adhesive formulated specifically for postforming applications.

5 GAL

55 GAL

330 GAL



NF942/943
Nonflammable, high solids, OTC-compliant spray-grade contact adhesives. Contains no methylene chloride.

OTC

5 GAL

55 GAL

330 GAL



WA 950/951
Fast-drying, spray-grade contact adhesive formulated for non-postforming operations. An easy-to-use, high-strength, economical bonding solution.

5 GAL

55 GAL

330 GAL

Low-VOC Contact Adhesives

Low-VOC contact adhesives contribute to a healthier planet. These formulations help reduce emissions that contribute to ground-level ozone and smog, supporting improved air quality in our communities.



WA 1700/1701

Outstanding bond and heat strength that can be sprayed, brushed, or rolled for flatwork applications. Requires less air pressure for easier spraying than traditional contact adhesives.



WA 1800/1801

Ozone Transport Commission (OTC) compliant adhesive for postforming applications. Contains the same rubber system as traditional solvent-based adhesives.



WA 1900/19001

California and Ozone Transport Commission (OTC) compliant adhesive only for non-postforming applications. Requires less air pressure for easier spraying than traditional contact adhesives.



WA H₂O

Nonflammable, water-based contact adhesive that can be sprayed, rolled, or brushed. Ideal for postforming or non-postforming operations — a low-VOC alternative for operations where flammable solvents are prohibited or regulated.



Fabricator Support

We see fabricators as trusted partners, and that partnership deserves our support. We have your resources to help.

- Adhesive Selection Tool
- Dedicated Wilsonart Adhesive sales reps
- Hands-on training through Fabricator University
- Instructional videos for Wilsonart products
- Online technical data

EXPLORE [WILSONART.COM/FABRICATION](https://www.wilsonart.com/fabrication) TO LEARN MORE.



Canister Contact Adhesives

Canister contact adhesives are self-contained and convenient. Solvent-based solutions (low-VOC, flammable, nonflammable) are available in multiple sizes.



WA 700/701
High-strength, high-tack adhesive formulated for use with high pressure laminates. Bonds quickly using a web spray pattern.

30 LB

140 LB

300 LB



WA NF702/703
Patented, nonflammable, methylene chloride-free contact adhesive that is tacky to the touch when ready to bond.

30 LB

140 LB

300 LB



WA 730/731
Low-VOC, HAPS-free adhesive formulated for use with high pressure laminates. Reduces telegraphing with an innovative pebble spray pattern.

OTC

30 LB

140 LB

300 LB



WA 740/741
High-speed, high-strength adhesive formulated for use with high pressure laminates. Bonds quickly using a web spray pattern.

30 LB

140 LB

300 LB

CANISTER CONTACT ADHESIVES



WA NF742/743
Patented, nonflammable, methylene chloride-free contact adhesive that is dry to the touch when ready to bond. Safer and easier to spray than other methylene chloride products.

30 LB

140 LB

300 LB



NF702A
High-speed, methylene chloride-free, high-strength adhesives formulated for high pressure laminates, fabrics, foam, wood, metals, papers, and plastics.

OTC

14.2 OZ



WA 700A/740A
High-speed, high-strength adhesive formulated for high pressure laminates, fabrics, foam, wood, metals, papers, and plastics. California-compliant High Tack adhesive is also available.

OTC

14.2 OZ





PVA (Polyvinyl Acetate) Adhesives

Wilsonart PVA Adhesives are ideal for panel lamination and wood assembly, including applications with laminates, veneers, and even metals. Commonly used in cabinetry, furniture manufacturing, and architectural panel production, these adhesives provide strong, reliable bonds with variable set times — giving you the flexibility to choose between faster bonding or extended open time for greater precision.



PVA (POLYVINYL ACETATE) ADHESIVES

Wood Glue

Wilsonart offers a range of PVA Wood Glues for various wood assembly applications. These glues deliver reliable, high-performance results for all your wood assembly needs.



WA 10 GLUE

Fast-setting glue formulated for wood-to-wood applications and panel manufacturing operations that require faster machine times.

GREENGUARD

OTC

1 PT

1 GAL

5 GAL

55 GAL

275 GAL

WA 30 GLUE

High-strength, fast-setting, yellow glue ideal for wood assembly. Glows under a blacklight and sands like wood, unlike typical wood glue.

GREENGUARD

OTC

1 PT

1 GAL

5 GAL

55 GAL

275 GAL

Type II Glue



WA TYPE II GLUE

Water-resistant PVA assembly adhesive that can be used in hot and cold press panel operations or radio frequency curing operations. Recommended for decorative edge and postform miters.

GREENGUARD

OTC

1 PT

1 GAL

5 GAL

55 GAL

270 GAL

Melamine Glue



WA MELAMINE ADHESIVE

Acrylic adhesive formulated to bond non-porous materials (including melamine, vinyl, PVC, metal, finished plywood, stone, tile, and acrylics) to porous surfaces.

GREENGUARD

OTC

1 PT

1 GAL

5 GAL

500 LB

2500 LB

Panel Lamination & Additional PVA Adhesives

Wilsonart’s HPL panel lamination PVAs are engineered for high-volume production, providing fast-setting, strong bonds that ensure consistent results in large-scale applications. With superior bond strength and quick drying times, Wilsonart’s HPL adhesives are the reliable choice for demanding, high-output environments.



WA 3000
Quick setting, high-strength adhesive ideal for postforming, nip and stack, or heated nip operations. Can be sprayed or applied with a glue spreader.



WA 3100
PVA adhesive formulated to bond laminate to a variety of substrates in cold press applications.



WA 3125
Economical, low viscosity, water-resistant PVA for use in hot press, cold press, or RF curing operations.



WA 3135OV
Low-viscosity PVA adhesive, specially formulated for veneers. Performs well with laminates and meets or exceeds the Window & Door Manufacturers Association (WDMA) requirements for Type I and Type II door adhesives.




PANEL LAMINATION & ADDITIONAL PVA ADHESIVES



WA 3140
High-solids, economical, PVA-based adhesive formulated for use with high pressure laminate in hot press, cold press, pinch roll, and dead stack applications.



WA 3310
This PVA is made exclusively for bonding metal (non-copper & non-ferrous) like Wilsonart Decorative Metals to board applications. Can be applied by standard glue spreaders or paint roller.





Solvents & Cleaners

For any sticky messes, Wilsonart solvents and cleaners are formulated to easily and effectively remove excess contact adhesive. Whether you choose a solvent to clean your equipment or a cleaner to remove adhesive residue from a decorative surface, Wilsonart has the solution to keep your project in order.



WA 130
Extremely flammable, low-VOC solvent designed to dissolve dried adhesive film and clean equipment like brushes, spray guns, pumps, and pressure pots.

OTC

1 GAL

5 GAL

55 GAL

SOLVENTS & CLEANERS

Solvents

Clean the equipment used for your project by dissolving rubbers and resins. Available solutions include industrial-grade solvents and low-VOC options.



WA 110
Extremely flammable solvent designed to dissolve dried adhesive film and clean equipment like brushes, spray guns, pumps, and pressure pots.

1 GAL

5 GAL

55 GAL



WA ACETONE
Fast-evaporating acetone perfect for cleaning fabricated parts and decorative surfaces without leaving a sticky residue or oily film like lacquer thinner.

California icon

1 GAL

5 GAL

55 GAL

Cleaners

Clean the surfaces used for your project by dissolving leftover resins.



WA 121
Extremely flammable hydrocarbon blend formulated to remove overspray/adhesive residue from fabricated parts and decorative surfaces without smearing or leaving an adhesive film.

1 GAL

5 GAL

55 GAL



CITRUS CLEANER
Extremely flammable, OTC-compliant cleaner formulated to dissolve and remove dried adhesive overspray and residue from high pressure laminate.

California icon

OTC

14.2 OZ

Recycling icon



Color Matched Caulk

Our color matched caulk is a high-quality sealant that can be applied to countertops, cabinets, built-ins, and more.



COLOR MATCHED CAULK
Formulated to match the color of Wilsonart HPL, TFL Panels, Solid Surface, Quartz, and Thinscape.



Free of methylene chloride.



WILSONART LEADS INDUSTRY RESPONSE TO EPA BAN ON METHYLENE CHLORIDE.
Wilsonart predicted the landmark decision by the EPA to ban most uses of methylene chloride. Several years prior, we developed the Nonflammable NF700 series, NF740 Aerosol & Canister series, and NF940 Bulk contact adhesive series as alternatives to conventional adhesives containing methylene chloride.





YOUR VISION,
delivered.

SURFACES YOU LOVE.

SERVICE YOU CAN COUNT ON.

PEOPLE WHO CARE.

For more technical information, product details, and fabricator support, visit
wilsonart.com/adhesives-products.



 **Wilsonart®**
ENGINEERED SURFACES

2501 Wilsonart Drive
P.O. Box 6110
Temple, TX 76503-6110

Wilsonart.com | 800.433.3222
©2025 Wilsonart LLC

Wilsonart®, Thinscape®, and its
respective logos are registered
trademarks of Wilsonart LLC.